


Parabel

Applies labels to base of tubs & jars

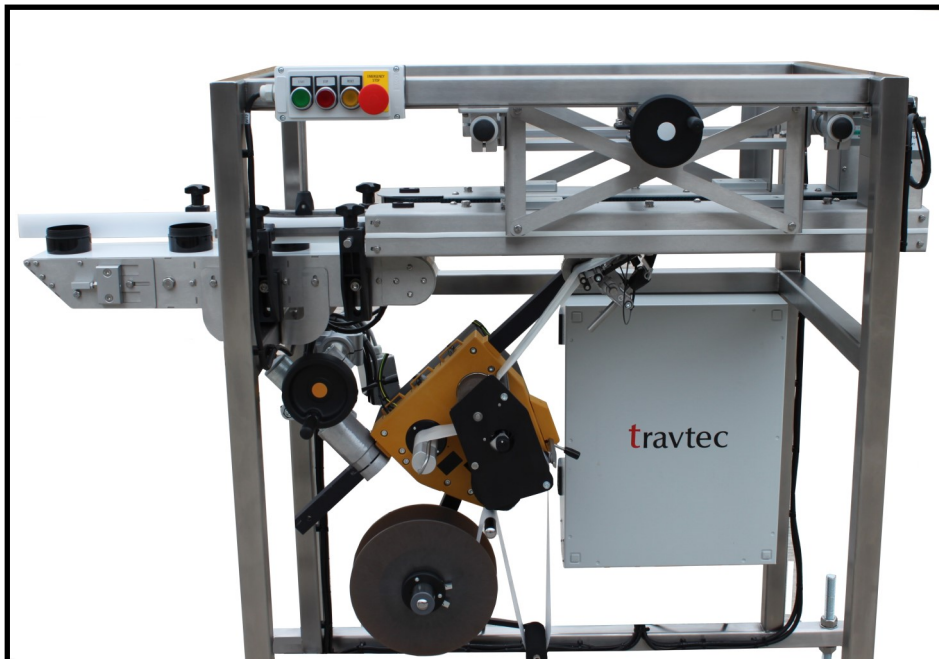

Automatic underside application of labels to tubs, jars & cans

Total control of product to enable accurate label placement to underside of pack.

Can be supplied as inline unit, or free-standing with optional infeed conveyor.

The variable speed twin-belt drives are easily synchronised with existing conveyors ensuring positive control and guidance,

The innovative design is easily attached to most conveyors with minimum disruption.

Choice of label applicators, including print/apply.

TECHNICAL SPECIFICATION:

Construction: *Stainless steel construction. Quick-change design. CE Certified*

Controls: *Low voltage brushless variable speed DC Motors. IP66 Rated.*

Power Required: *220/240 v AC Single phase. 0.5 kW loading.*

Speed: *Variable up to 30 mtrs per minute.*

Product Sizes: *Diameter 20 - 120mm; Height: 10 - 350mm.*

Dimensions: *Length: 1000mm; Width: 600mm; Height: to suit..*

Travtec Limited, 2 Orford Court, Greenfold Way,
Leigh, Lancashire. WN7 3XJ. United Kingdom
Tel: +44 1942 677664 - Fax: +44 1942 261101
www.travtec.co.uk - info@travtec.co.uk

travtec
Packaging Engineering